PORTABLE CONE CRUSHER PLANT

THE 400¢ TACKLES THE MOST ABRASIVE ENVIRONMENTS.



LIPPMANN

Portable Cone Crusher Plant

400c

Overflow chute When mobility and toughness matter, count on the 400c. This portable cone crusher plant was specifically designed to take on the most abrasive and toughest materials in aggregates, mining, and C&D recycling—all with mobile capabilities. An impressive 52" (1321mm) cone crusher lets 400c bushing-type high you directly feed the plant and handle larger, secondary speed cone crusher rock it might see from a big primary crusher. 36" (914mm) Feed conveyor with swing capabilities Optional feed conveyor with surge capacity 400c LIPPMANN (6) Hydraulic run-on jack legs

CONE STANDARD FEATURES

- 400 Hp 1200 RPM (298kW 20Hz)
- Bushing-type cone with superior speed throw and cavity design
- Multiple liner configurations
- 4 axle carrier

- Large walkways for easy access to crusher and auxiliary items
- 42" (1067mm) Rear discharge conveyor

ADDITIONAL OPTIONS

- Overflow chute
- NEMA 12-motor control center
- (4) Leveling hydraulic jacks -70,000 lbs (31,752kgs)
- (6) Run-on jack legs





Hydraulically removable electric cabinet reduces vibration to components.



Overflow chute prevents spillage, keeping product moving, and maintaining a clean site.



Hydraulic height adjustment on discharge conveyor.


400c CONE PLANT TECHNICAL SPECIFICATIONS

TRANSPORTATION								
	AXLE		KING PIN		TOTAL			
	LBS	KGS	LBS	KGS	LBS	KGS		
With Long Conveyor, Feeder, Hydraulic Panels	73,834	33,491	57,295	25,989	131,128	59,479		
Short Conveyor	-2,587	-1,173	+231	+105	-2,355	-1,068		
Manual Panels	-1,844	-836	-573	-260	-2,416	-1,096		
No Electrical Panel	-956	-434	-294	-133	-1,250	-567		

Complete for Transport: Remove/move feed in box, lower feed in box stays, lower feed in box overflow chute, lower top walkway handrails

SPECIFICATIONS						
	US	METRIC				
Crusher	400c	400c				
Head Diameter	52"	1321mm				
Hydraulic Capacity	39.6 gal	150L				
Lube Oil Capacity	132 gal	500L				
Discharge Conveyor	42" x 38'	1067mm x 12m				
Conveyor Discharge Height	11'-8"	3.56m				

HORSEPOWER						
	НР	KW				
Crusher	400	298				
Hydraulic Power Unit	10	7.46				
Lube Unit	10	7.46				
Air Oil Cooler	7.5	5.59				
Heaters	5.36	4				
Rear Discharge Conveyor	20	15				

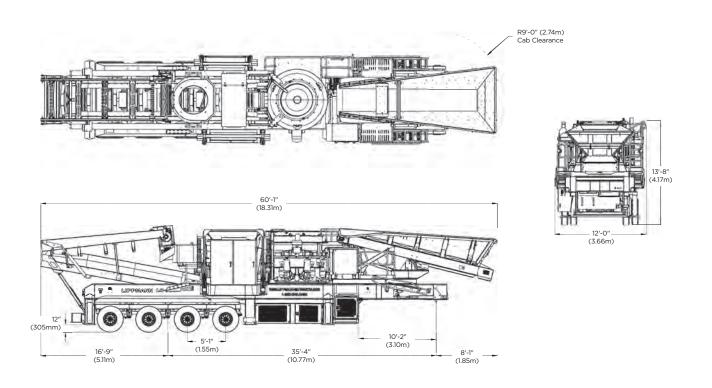

LIPPMANN

3271 East Van Norman Avenue Cudahy, WI 53110

Lippmann-Milwaukee.com

800-648-0486

AUTHORIZED DISTRIBUTOR