

TRACK SCREEN PLANT

THE **L516R** SCREENER GIVES A CLEAN END PRODUCT



The Lippmann L516r High Energy Screener is a tough, robust screening tool designed to cope with the heaviest of applications. With the ability to handle some of the worst, untreated construction and demolition waste, the L516r can minimize material pre-handling and provide clean end products. It has proven to be extremely effective and has impressed operators across applications like site reclamation, construction and demolition waste, working with difficult materials such as heavy rock, sticky clay and fines, and boulder clay.

- 5' x 16' high energy 2 bearing double deck screen
- 127 Hp CAT engine
- Hydraulic adjustable height stockpile conveyors
- Track mobility
- Wheeled version optional
- Belt or apron feeder
- Hydraulic adjustable angle screen

LIPPMANN


L516R TECHNICAL SPECIFICATIONS

SPECIFICATIONS	
Length - working	49'-10"
Width - working	44'-1"
Length - transport	50'-2"
Width - transport	9'-6"
Height - transport	11'-2"

CONVEYORS	
Top deck overs - belt width	55"
Top deck overs - stockpile height	12'-3"
Second deck overs - belt width	36"
Second deck overs - stockpile height	11'-10"
Conveyor - collecting - belt width	48"
Conveyor - screen throughs - belt width	36"
Conveyor - screen throughs - stockpile height	11'-5"

FEEDERS	
Belt feeder - belt width	55"
Apron feeder - apron width	55"
Screen	5' x 16' DD
Angle	16-20 deg.
Stroke	0.23"-0.39"
Speed	950-1130 rpm

POWER UNIT & HYDRAULICS	
Engine	CAT C4.4
Engine power	127 HP
Engine speed	2200 rpm
Diesel total flow	105 gal
Hydraulics - plant total flow	99.3 gal
Hydraulic tank capacity	166 gal

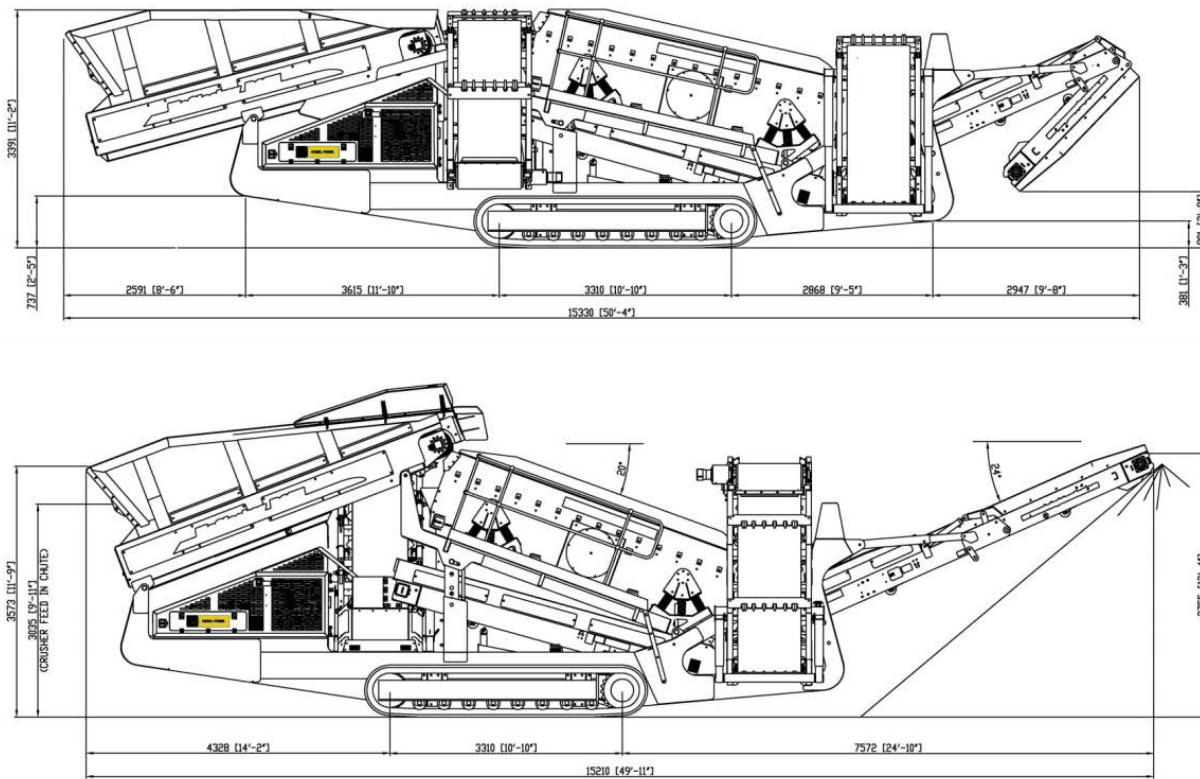

ADDITIONAL OPTIONS

- Screen - heavy-duty top deck fingers
- Screen - bottom deck fingers
- Top deck punch plate
- Top deck Bofor screen
- Radio remote control for tracks
- Plate apron feeder in lieu of belt feeder

AUTHORIZED DISTRIBUTOR

LIPPMANN

3271 East Van Norman Avenue
Cudahy, WI 53110

Lippmann-Milwaukee.com

800-648-0486