

HIGH PRODUCTION SCREENER

THE **L622S-T** ADAPTS TO A VARIETY OF APPLICATIONS



The most advanced and innovative 22'x6' portable vibratory screening plant today is the L622s-t. Featuring adjustable screen box angles allowing adaptability to a wide range of material applications including quarrying, mining, sand and gravel, coal screening, topsoil, and woodchip. With the highest-grade specifications and component parts, and offering a triple deck makes this screener a top choice for high productivity, quality and value.

- 22x6 heavy duty high energy 2 bearing 2 deck screen box
- 225Hp Cat engine
- Track or wheel mobile
- Integrated hydraulic folding stockpiling conveyors
- Remote control tipping grid
- Fast on site setup time - 15 minutes

LIPPMANN

L622S-T TECHNICAL SPECIFICATIONS

SPECIFICATIONS

Length - transport 15ft hopper	19.55 (64'-1")
Length - transport 12ft hopper	18.63m (61'.1")
Width	3.66m (12")
Height - transport track	3.59m (11' 09")
Weight - track	40,500 kgs (89,287 lbs)

SCREENBOX


Top deck dimensions	6710mmx1830mm (22'x6')
Bottom deck dimensions	6100mmx1830mm (20'x6')
Top deck screens - 5 off	6'x4' side tension
Top deck screens - 1 off	6'x2' side tension
Bottom deck screens - 5 off	6'x4' side tension

CONVEYORS

Side conveyor - stockpile height - track model	5100mm (16'-9")
Side conveyor - belt width	800mm (32")
32 deck transfer conveyor - belt width	1200mm (48")
Feed conveyor - belt width	1200mm (48")
Main conveyor - belt width	1400mm (55")
Tail conveyor - stockpile height - track model	5398mm (17'-8")
Tail conveyor - belt width	900mm (36")

POWER AND HYDRAULICS

Engine	CAT C7.1 Volvo D5
Engine power	225 hp
Engine speed	1800 rpm

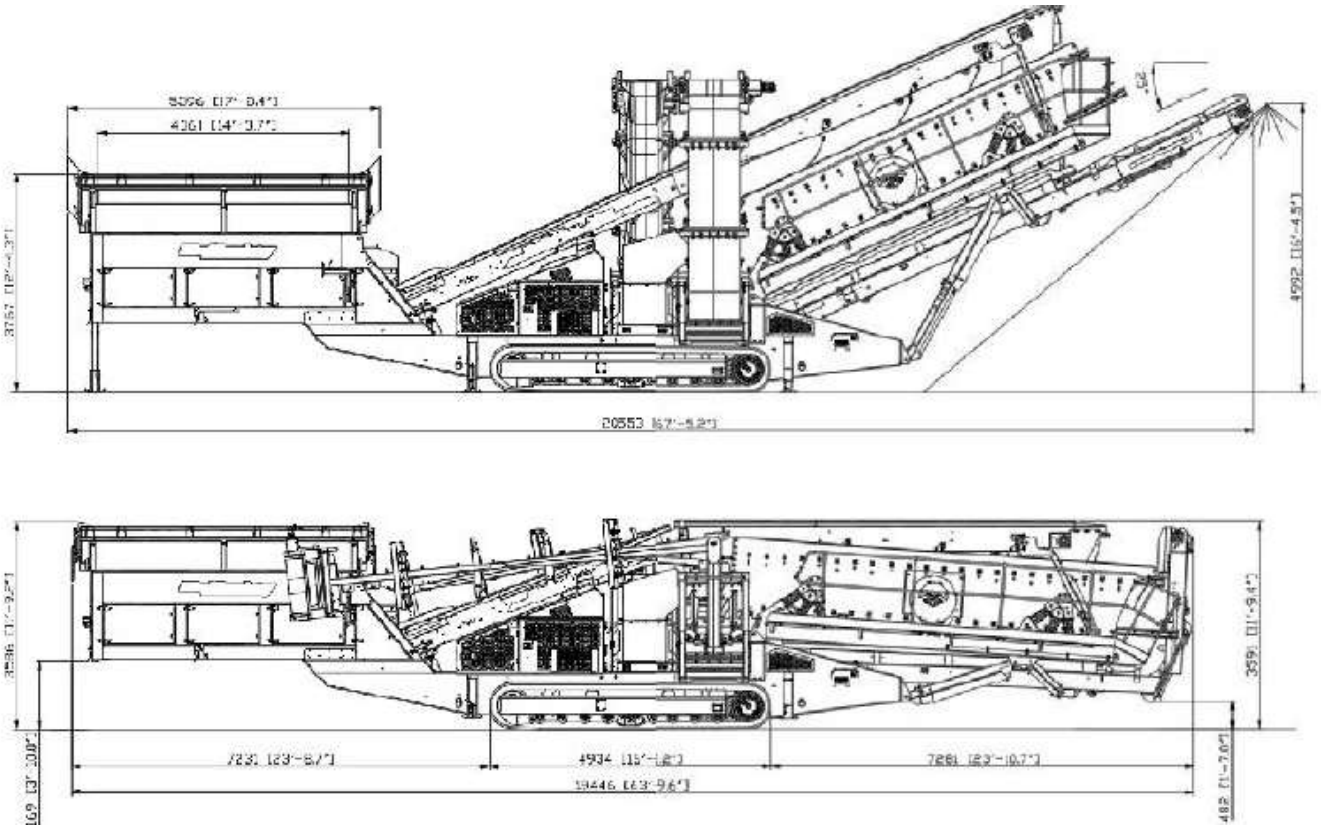

AUTHORIZED DISTRIBUTOR

LIPPMANN

3271 East Van Norman Avenue
Cudahy, WI 53110

Lippmann-Milwaukee.com

800-648-0486