

WHEELED STACKER

THE **100sw** STANDS WELL ABOVE THE COMPETITION



The Lippmann Wheeled Stackers have been designed for high capacity stockpiling operations. Conveyors come standard with electric drive, 7.5 cu. yard hopper, impact idlers under hopper and road towable. All units have optional upgrades of a diesel power unit, hydraulic main lift and hydraulic top fold along with dual power available to best suit the customer's application. The LWS Conveyor Line is also available as a radio-controlled track mounted unit. With its durable truss frame, large feed hopper and base production capacity of up to 800 TPH, the Lippmann LWS Stackers stand up well above the competition.

- Wide heavy-duty telescoping conveyor-36" (900mm)
- 3-position axle (Inline/Transverse/Radial)
- Integral kin pin/pivot point
- Wheel drive on lift axle
- Full automation package
- Counterweighted design keeps the axle out of stockpile

LIPPMANN


100sw TECHNICAL SPECIFICATIONS

CONVEYOR SPECIFICATIONS	
Belt Width	36" (900mm)
Belt Length (Pulley Centers)	100' (30,480mm)
Belt Type	Heavy Duty Plain 3-Ply, 3/16"x1/16"
Drive Pulley Diameter	14" (355mm)
Tail Pulley Diameter	12" (304mm)
Maximum Belt Speed	548 ft/min. (167 m/min.)
Maximum Conveyor Capacity	800 TPH

OPTIONAL SELF-CONTAINED DIESEL ENGINE	
Diesel Engine Size	100hp (74.5 kW)
Diesel Tank Capacity	87 US Gallon (330 L)
Hydraulic Tank Capacity	116 US Gallon (440 L)

WORKING DIMENSIONS	
Width	15' 4" (4,670mm)
Length	104' 10" (31,950 mm)
Height	40' 9-1/2" (12,430mm)

TRANSPORT DIMENSIONS	
Width	10' 11" (3,330mm)
Length	73' 6-1/2" (22,410mm)
Height (approximate)	13' 6" (4,110mm)
Total Weight (approximate)	27,000 lbs (12,300 kg)

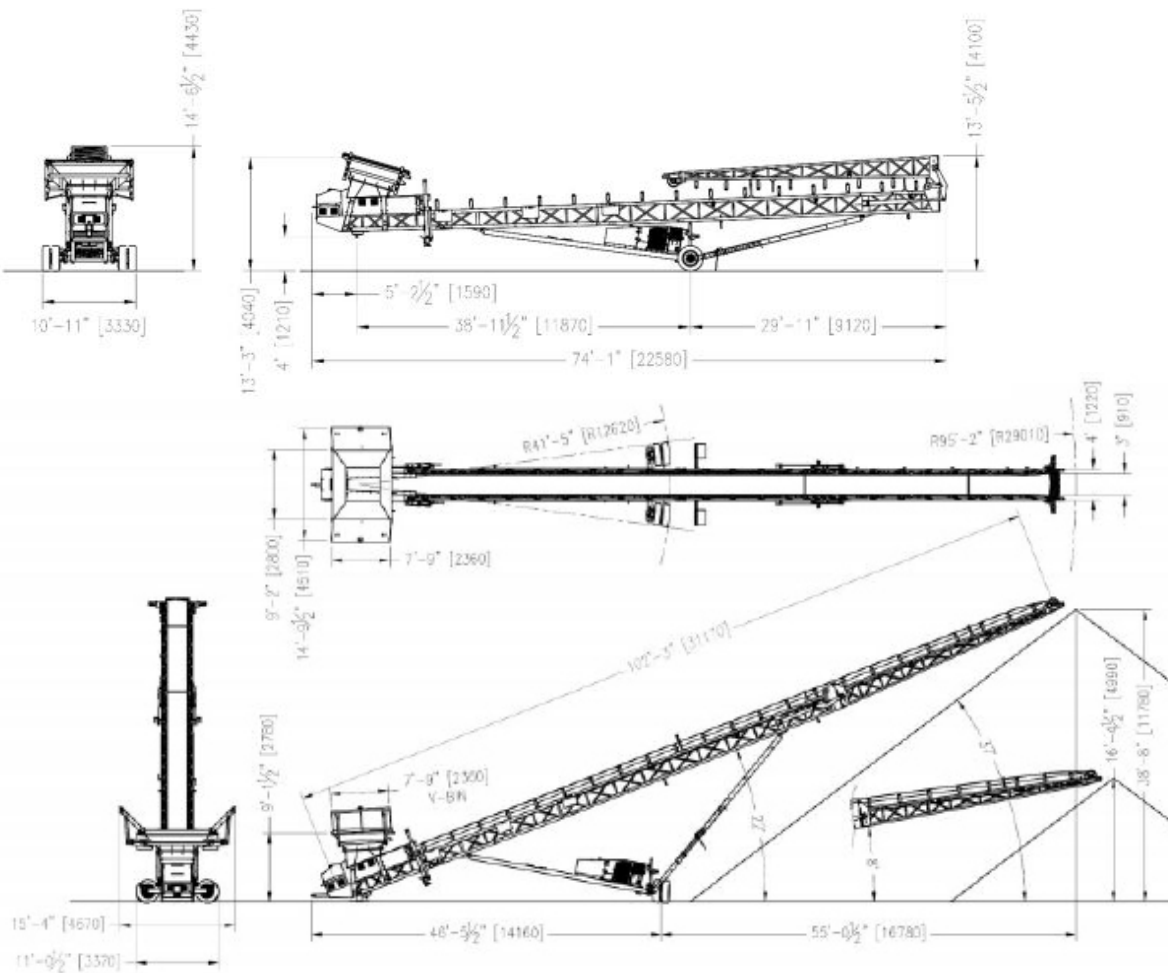

ADDITIONAL OPTIONS

- Self-contained diesel engine - hydraulic drive, hydraulic landing gear
- Dual power (electric/hydraulic)
- Belt scale
- Spray bar
- Chevron belt
- Asgico belt scraper
- Axle extensions
- Hopper wear plate liner
- Auxiliary guarding

AUTHORIZED DISTRIBUTOR

LIPPMANN

3271 East Van Norman Avenue
Cudahy, WI 53110

Lippmann-Milwaukee.com

800-648-0486