

JAW RECYCLING CRUSHER

THE EXTRA WIDE **3062J-W** ELIMINATES PREPPING MATERIAL



The 3062j-w jaw crusher is the only crusher on the market specifically designed extra wide for the recycling industry. It handles slabby concrete, reducing or eliminating the need to prep material. The short stature of the jaw crusher also contributes to the success of this crusher allowing material to easily enter the chamber without causing a tramp event. Another advantage to this plant is the large 62" feeder which allows the recycle material to easily flow into the jaw without any taper.

- An extra heavily ribbed steel frame-stress relieved after welding and before machining
- One piece steel pitman
- Heat-treated forged alloy steel eccentric shaft
- Steel cheek plates
- Oversized tapered roller bearings in both the pitman and frame. Tapered roller bearings exhibit a greater load carrying capacity compared to an equal sized spherical roller used in competitor's machines
- Reversible manganese steel jaw dies and extensions
- Two heavy-duty flywheels one grooved for V-belts
- Automatic Oil Lubrication System which delivers a metered flow of filtered oil to each bearing

LIPPMANN

3062J-W TECHNICAL SPECIFICATIONS

SPECIFICATIONS	
Jaw Crusher	30" x 62"
RPM	230 rpm
Max Feed Size	27"
Discharge Conveyor	N/A
Operating Speed	318 rpm
Feeder	62" x 18'
Operating Speed - Max	830 rpm
Grizzly Length	4'

HORSEPOWER	
Jaw Crusher	200
Autolube	1
Toggle Power Unit (optional)	7.5
Taper Wedge (optional)	1.5
Feeder	40
Discharge Conveyor	N/A


ADDITIONAL OPTIONS

- Hydraulic leveling jacks - (4) 70,000 lb.
- Six (6) run-on jack legs
- NEMA 12-motor control center
- Cross conveyor under grizzly
- Hopper extensions
- Hydraulic toggle
- Tire bulkheads

TRANSPORTATION (LBS.)	
Tires	11R22.5
Rear Axle	70,250
King Pin	54,250
Total	124,500
Weight of Feeder	36,250
Module	
Total Weight	160,750

HYDRAULIC TOGGLE OR MANUAL TOGGLE PLATE AVAILABLE [CLOSED SIDE SETTING (CSS) INCHES]	
3	220-243
3.5	280-309
4	337-375
4.5	399-421
5	420-463
8	*650-717
10	*799-882

* Manual toggle plate option only.
See page 2-10 from the Lippmann Jaw manual
3062 can be set from 3" to 7" (10" with toggle plate).

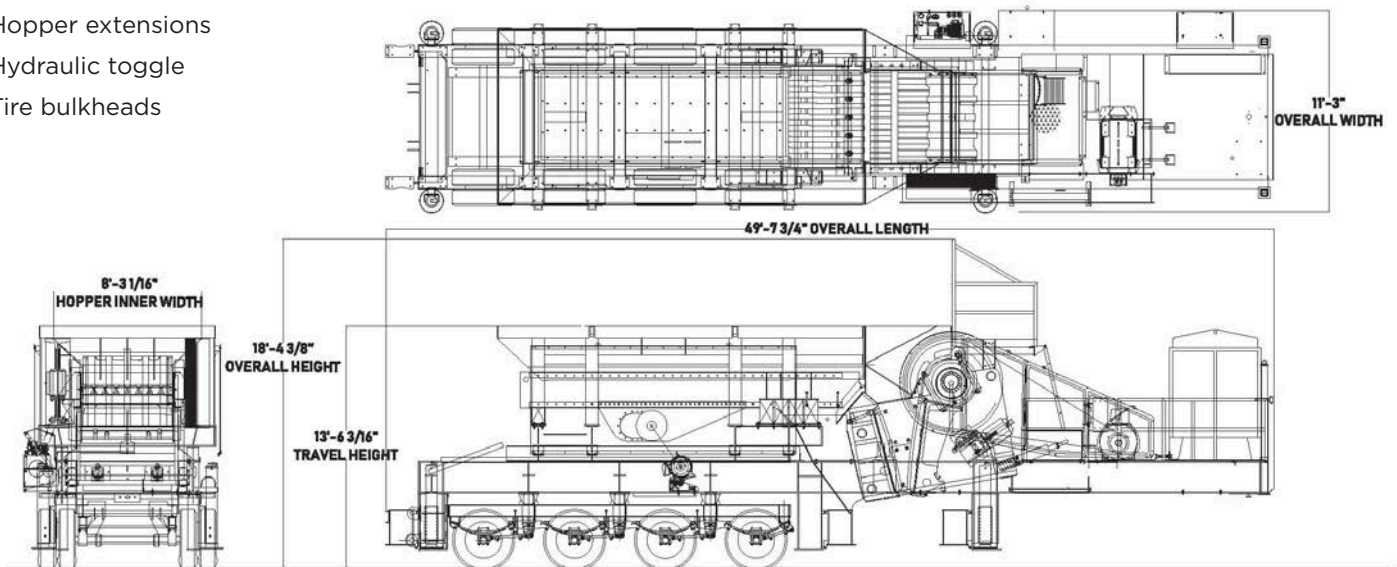

AUTHORIZED DISTRIBUTOR

LIPPMANN

3271 East Van Norman Avenue
Cudahy, WI 53110

Lippmann-Milwaukee.com

800-648-0486